



### Quality

The latest technology, the best materials and production controlled at every stage as well as our own research laboratories guarantee the highest quality.



### Service

Professional and fast service is the hallmark of Drutex, which has been setting trends in pre- and post-sales customer service for years.



### Security

Doors are equipped with reliable fittings and locks that ensure their safe use.



### Smart Home

Intelligent control of doors, windows, roller shutters, façade blinds, mosquito nets, gates, wickets and lighting using a smartphone.



Official Partner of FC Bayern

ul. Leszka Gierszewskiego 1, 77-100 Bytow  
+48 59 822 91 01

— SINCE 1985 —

The information presented in this advertising material is for informational and illustrative purposes only. Product specifications should be subject to verification with the technical data specified by the manufacturer.



BUSINESS PARTNER




## PVC WINDOWS

BORN OF PASSION  
AND EXPERIENCE



## IGLO 5 CLASSIC

The profile has a 5-chamber structure with a 70 mm installation depth. It has steel reinforcement of the sash and frame. The window is equipped with double EPDM seal: external and internal.

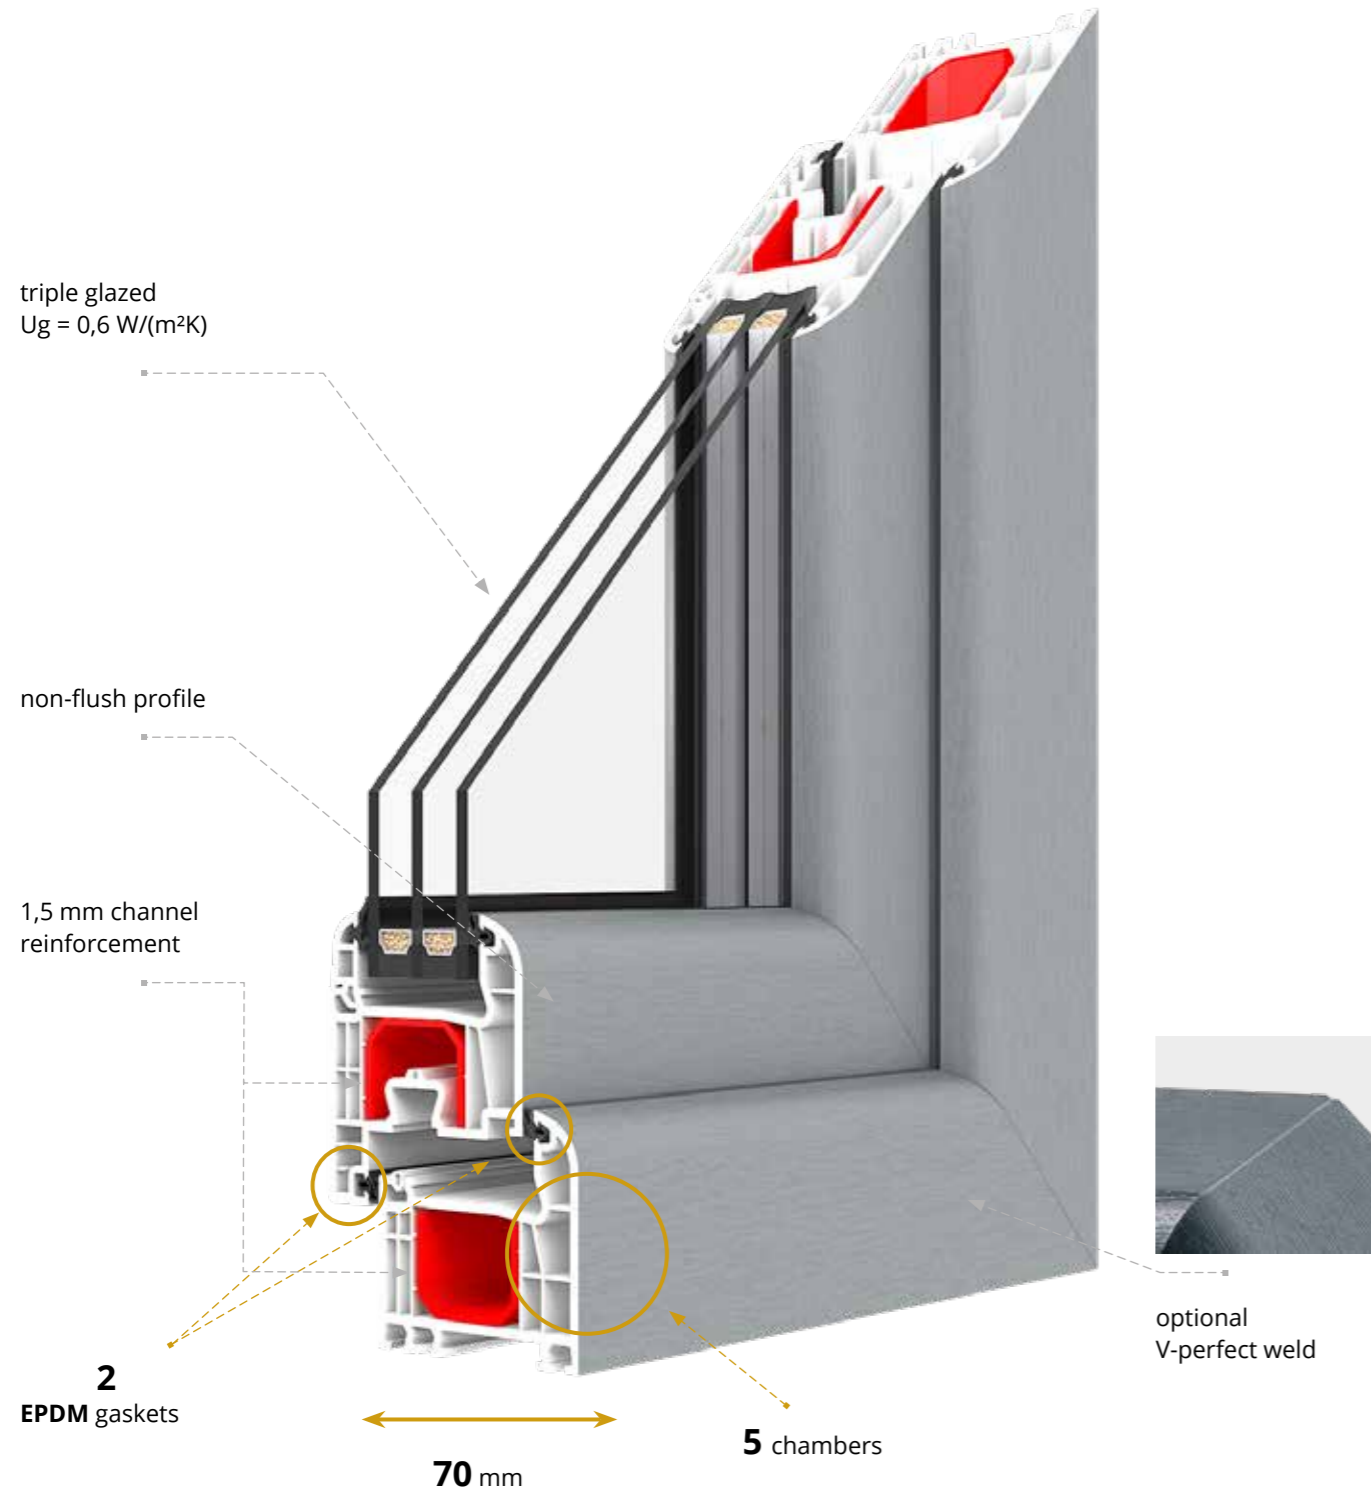


### IGLO 5 CLASSIC

RENOVATION FRAME 41 or 65 mm

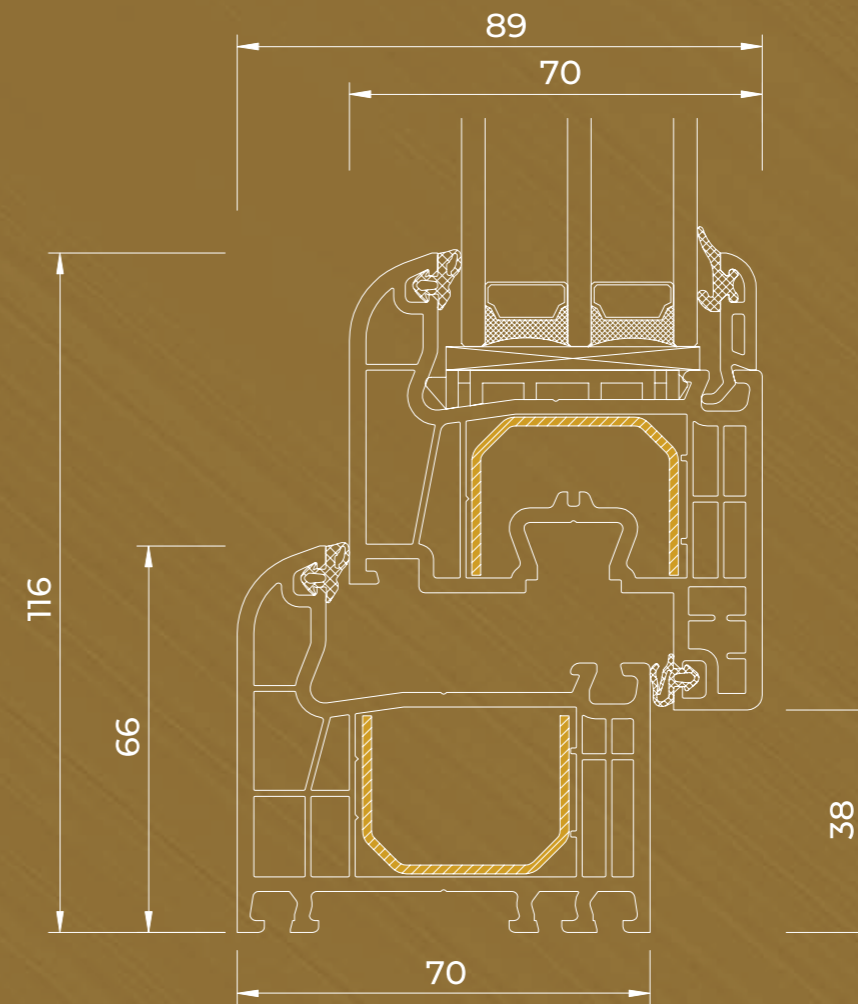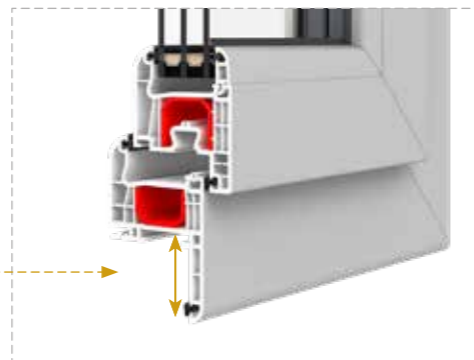

### IGLO 5 CLASSIC

RENOVATION FRAME 41 or 65 mm

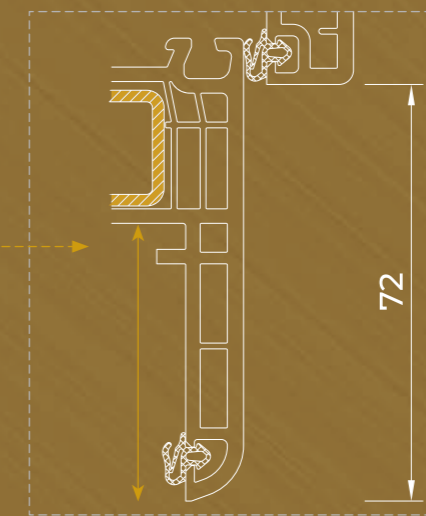

- MACO fittings with 2 anti-burglary catches
- 2-chamber glazing unit filled with argon with  $U_g=0,6$  W/(m<sup>2</sup>K)
- glazing with packages in the range of 24-40 mm
- galvanized steel frame or Swisspacer Ultimate warm edge
- microventilation
- aluminum handle
- black or grey EPDM perimeter and glazing seals
- wide range of PVC veneer colors
- white profile color (brown optional)
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 1,5 mm steel reinforcement of the frame and door leaf (2 mm in the case of the balcony door leaf) in the C-shaped channel reinforcement
- 5-chamber PVC window under-sill strip with a gasket

## IGLO 5 CLASSIC

**5**  
chambers

**2**  
EPDM gaskets

**70**  
installation depth  
/ mm /

**0,83\***  
Uw for  $U_g=0,6$  W/(m<sup>2</sup>K)

\* value determined by calculation method

**R**  
renovation frame  
41 or 65 mm


Class profile

**A**





**IDEAL NEO MD aluplast®**


The profile has a 6-chamber structure with a depth of 76 mm. It has a steel reinforcement of the sash and frame. The window is triple sealed.

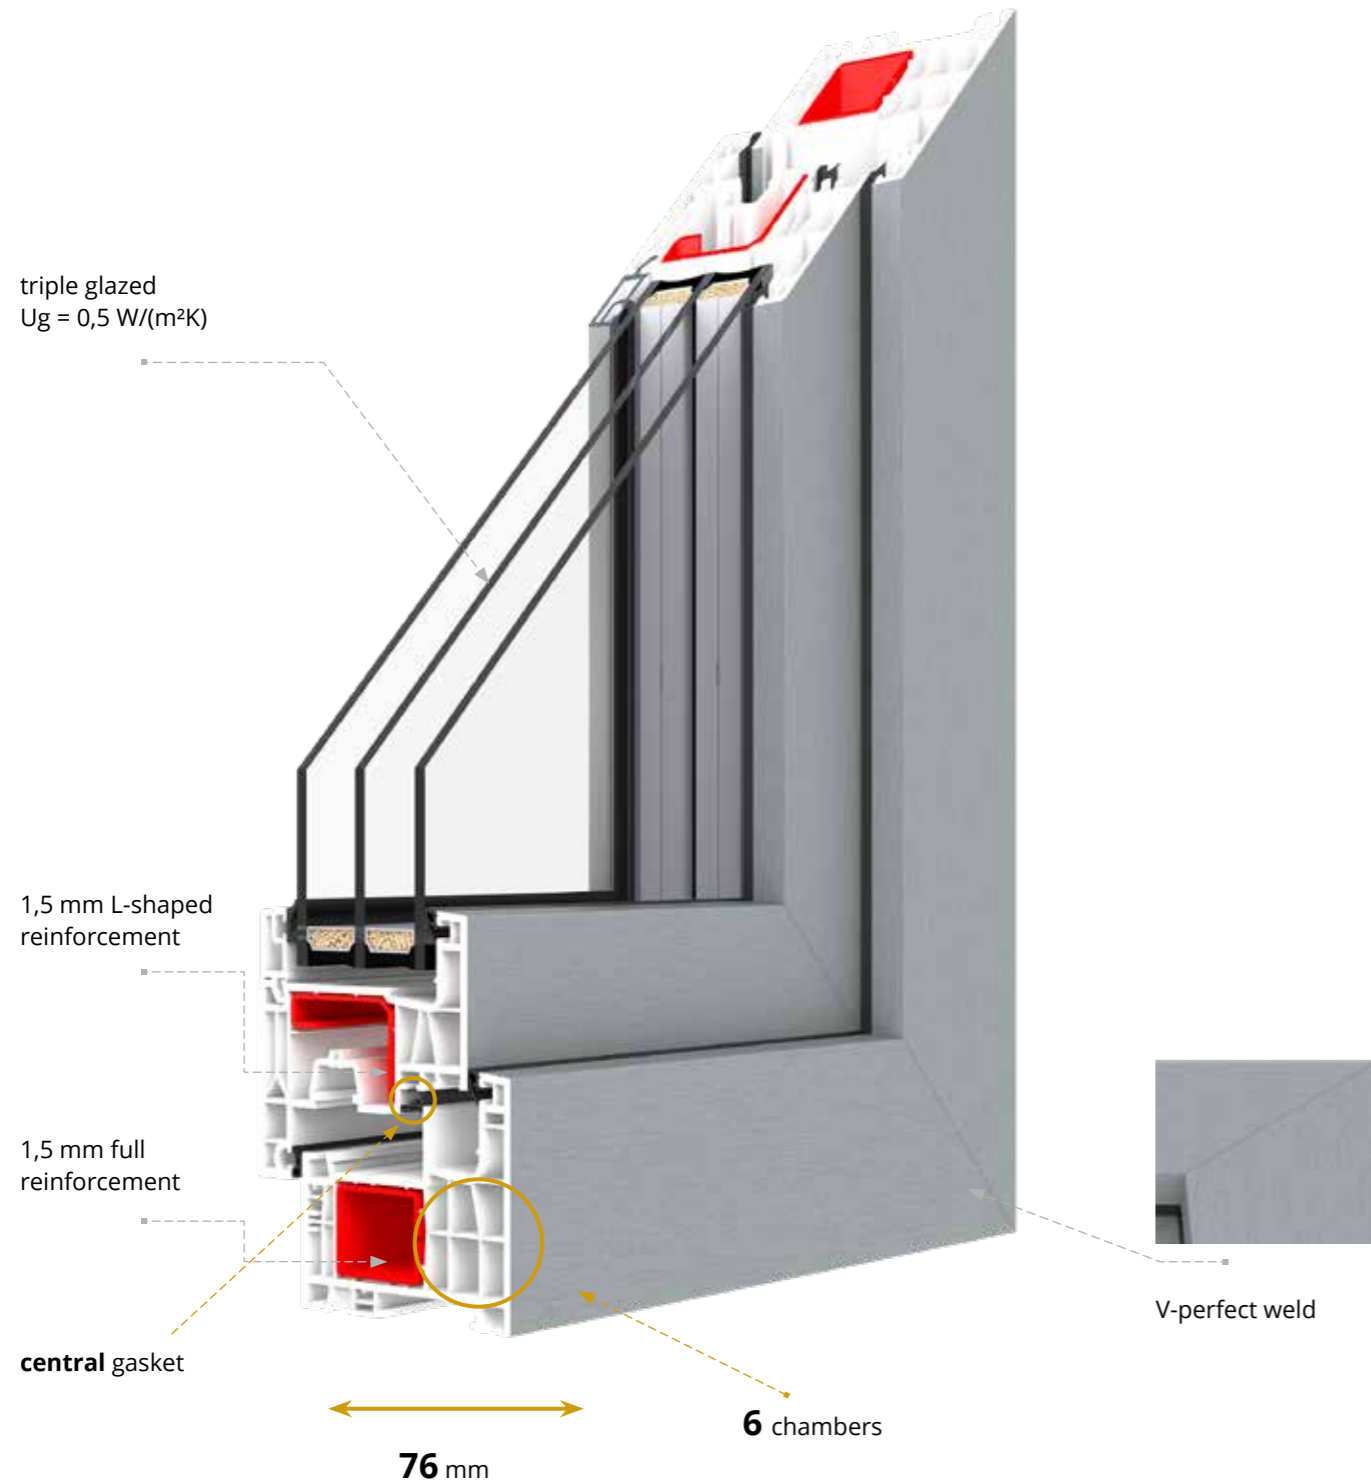

**IDEAL NEO MD**  
RENOVATION FRAME 40 mm

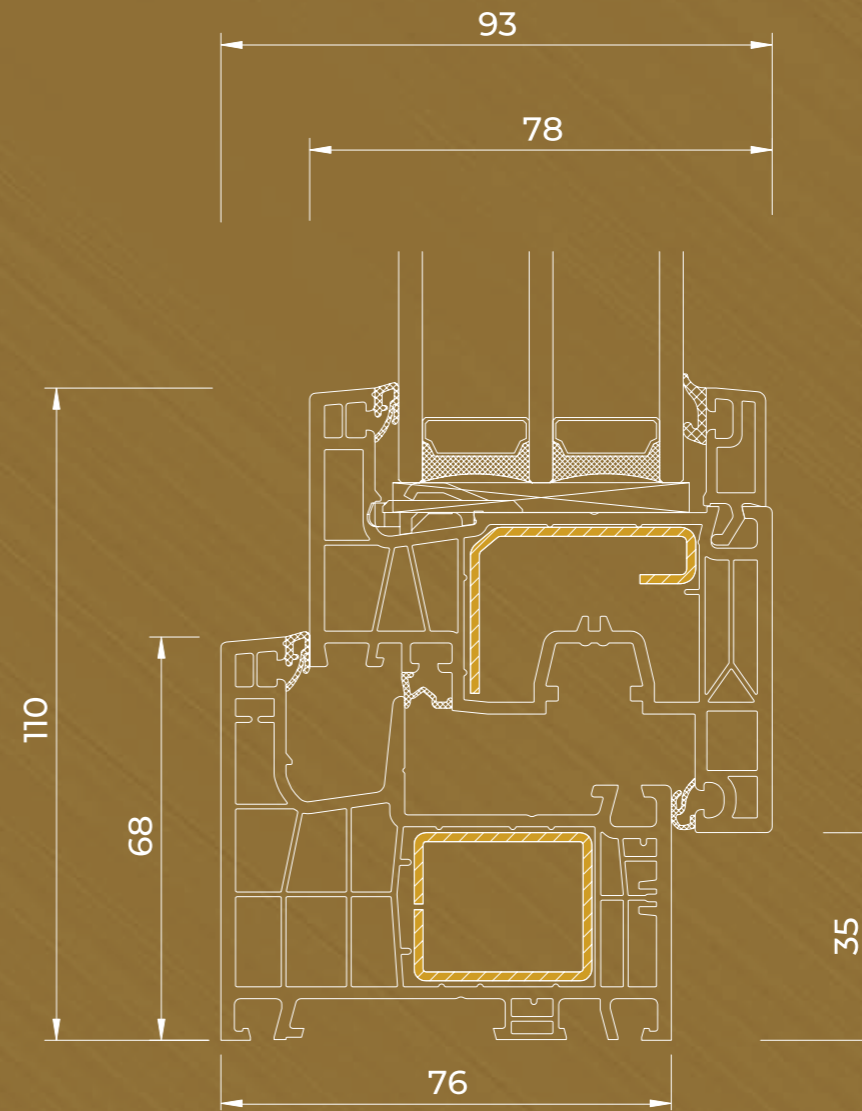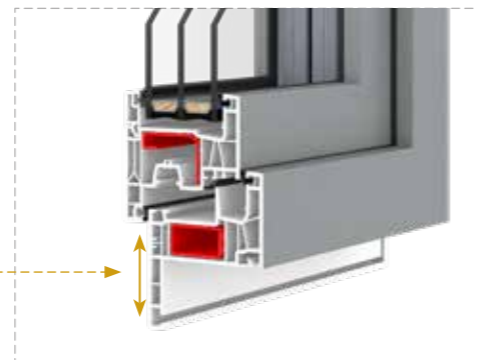

**IDEAL NEO MD**  
RENOVATION FRAME 40 mm

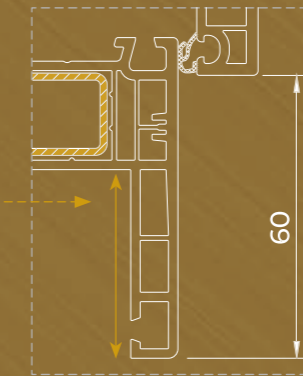

- ROTO fittings
- 4 anti-burglary catches
- 2-chamber glazing unit filled with argon with  $U_g=0,5 W/(m^2K)$
- glazing with packages in the range of 24-54 mm (by default in a 2-chamber package 48 mm - 4/18/4/18/4)
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- perimeter and glazing seals in black or grey color
- wide range of PVC veneer colors
- white profile color (brown or anthracite optional)
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 1,5 mm steel reinforcement of the frame and door leaf (2 mm in the case of the balcony door leaf)
- under-sill strip

**IDEAL NEO MD**

**6**  
chambers

**3**  
corner welded gaskets

**76**  
installation depth  
/ mm /

**0,76\***  
Uw for  $U_g=0,5 W/(m^2K)$

\* value determined by calculation method

**R**  
renovation frame  
40 mm

**aluplast®**  
Class profile



**B**



## IDEAL NEO MD-FS | aluplast®

A modern 5-chamber system with a depth of 70 mm, featuring a cubist design and a sash overlap of 108 mm. Instead of steel in the sash, it uses fiberglass inserts and bonded glazing. A visually light yet durable construction with an optional movable mullion.

triple glazed  
Ug = 0,5 W/(m²K)

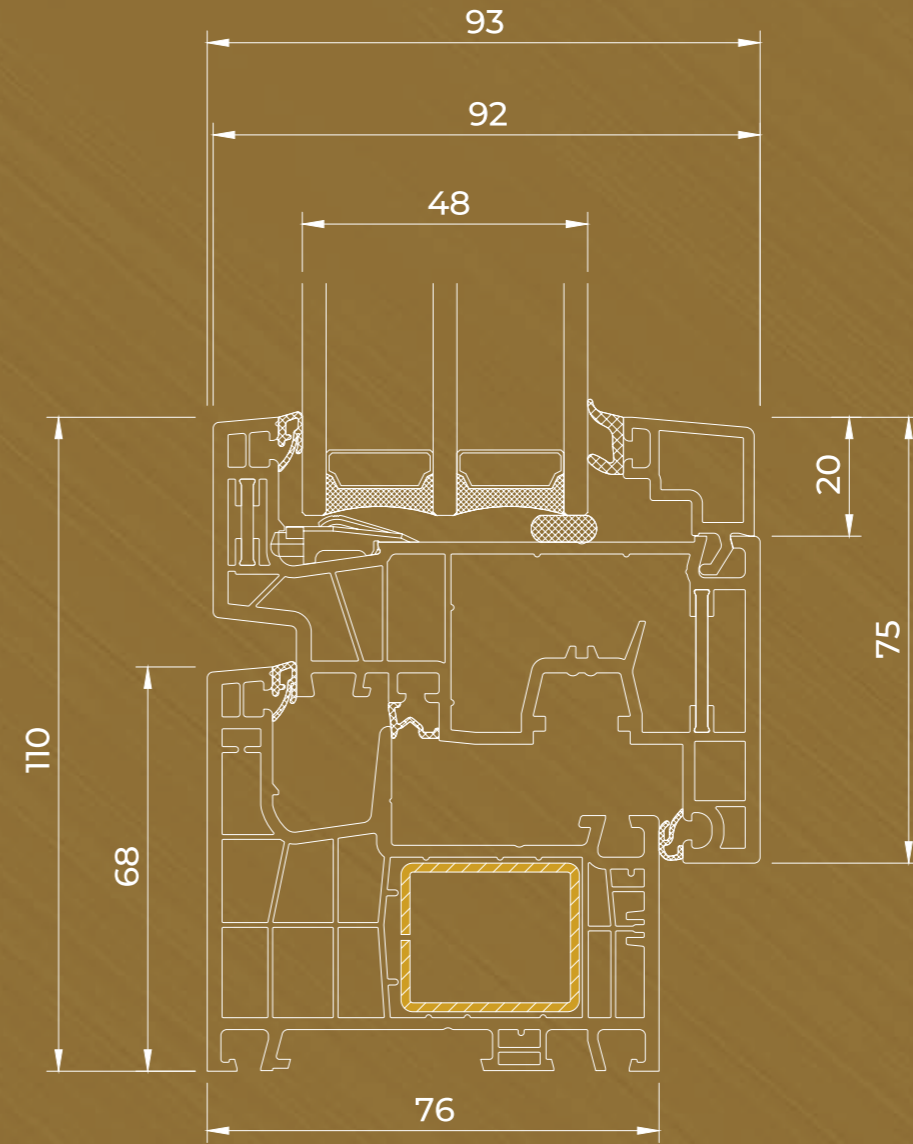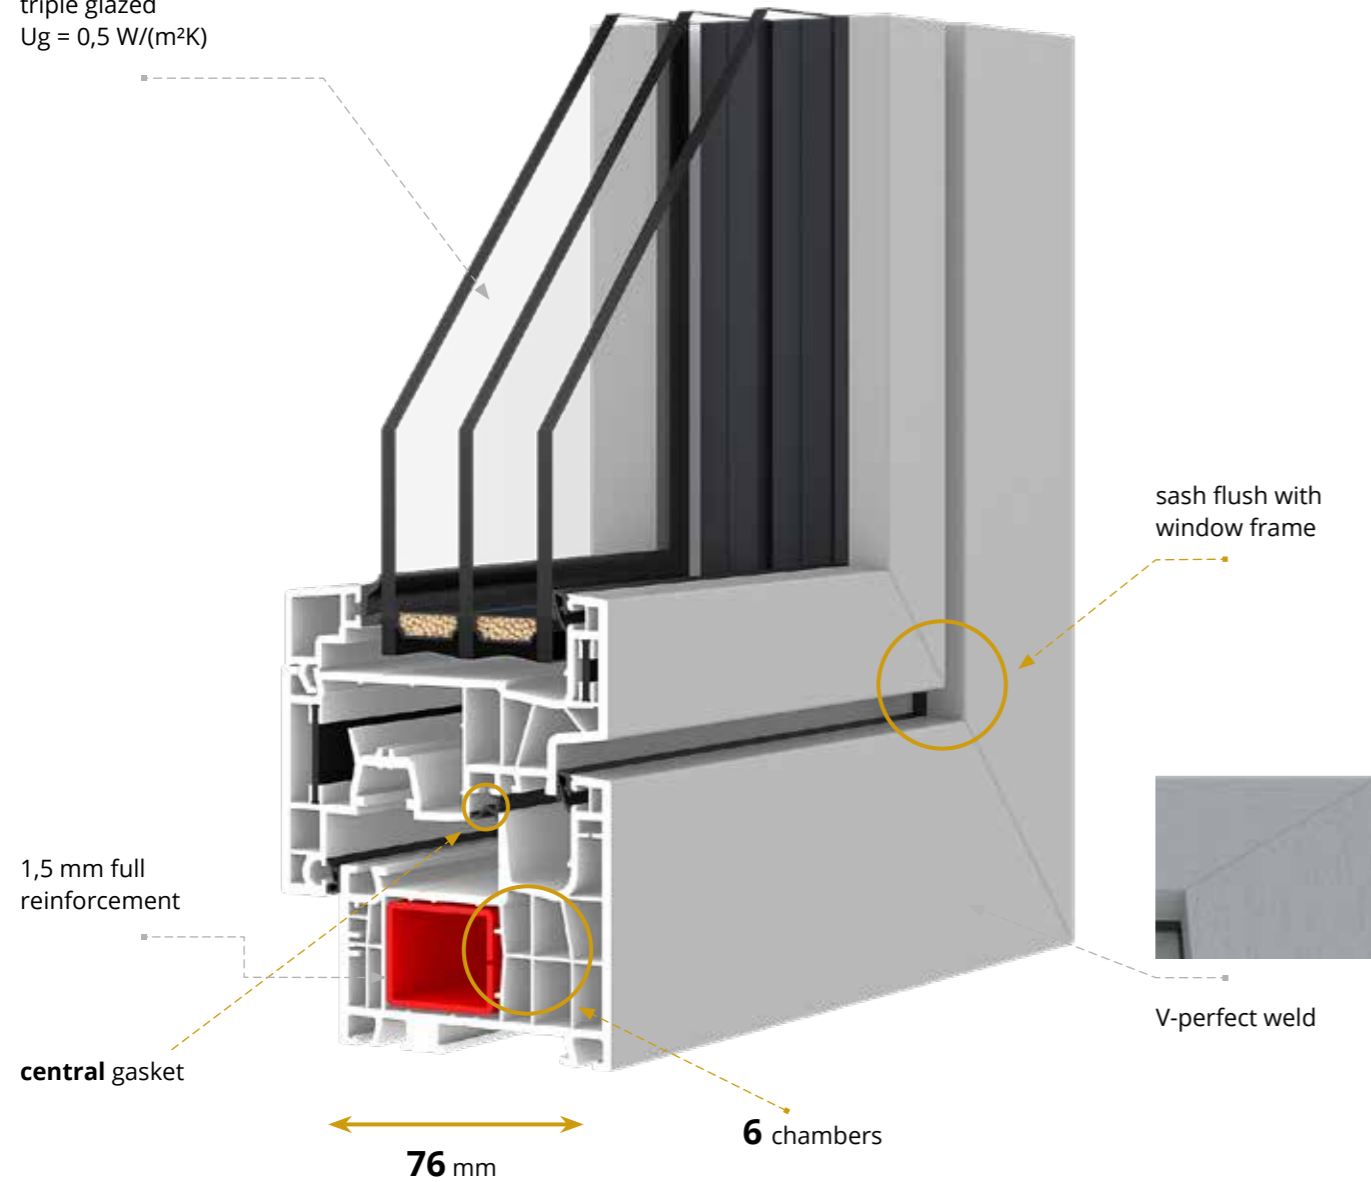

- ROTO fittings
- 4 anti-theft strikers according to the size of the sash and the hardware system
- glazing with packages in the range of 36-68 mm
- by default in a 2-chamber glazing unit filled with argon (48 mm - 4/18/4/18/4) with Ug=0,5 W/(m²K)
- Swisspacer Ultimate warm edge
- microventilation
- aluminum handle
- perimeter and glazing seals in black or grey color
- wide range of PVC veneer colors
- white profile color (brown or anthracite optional)
- handle misplacement locking mechanism
- filling of the lower hardware groove
- under-sill strip

## IDEAL NEO MD-FS

**6**  
chambers

**3**  
corner welded gaskets

**76**  
installation depth  
/ mm /

**0,73\***  
Uw for Ug=0,5 W/(m²K)  
\*value determined by calculation method


**aluplast®**  
Class profile

**B**





## IGLO ENERGY CLASSIC


7-chamber frame and sash profiles, with a construction depth of 82 mm. The system is equipped with a specially designed triple seal: external and internal made of EPDM and central one made of foamed EPDM.

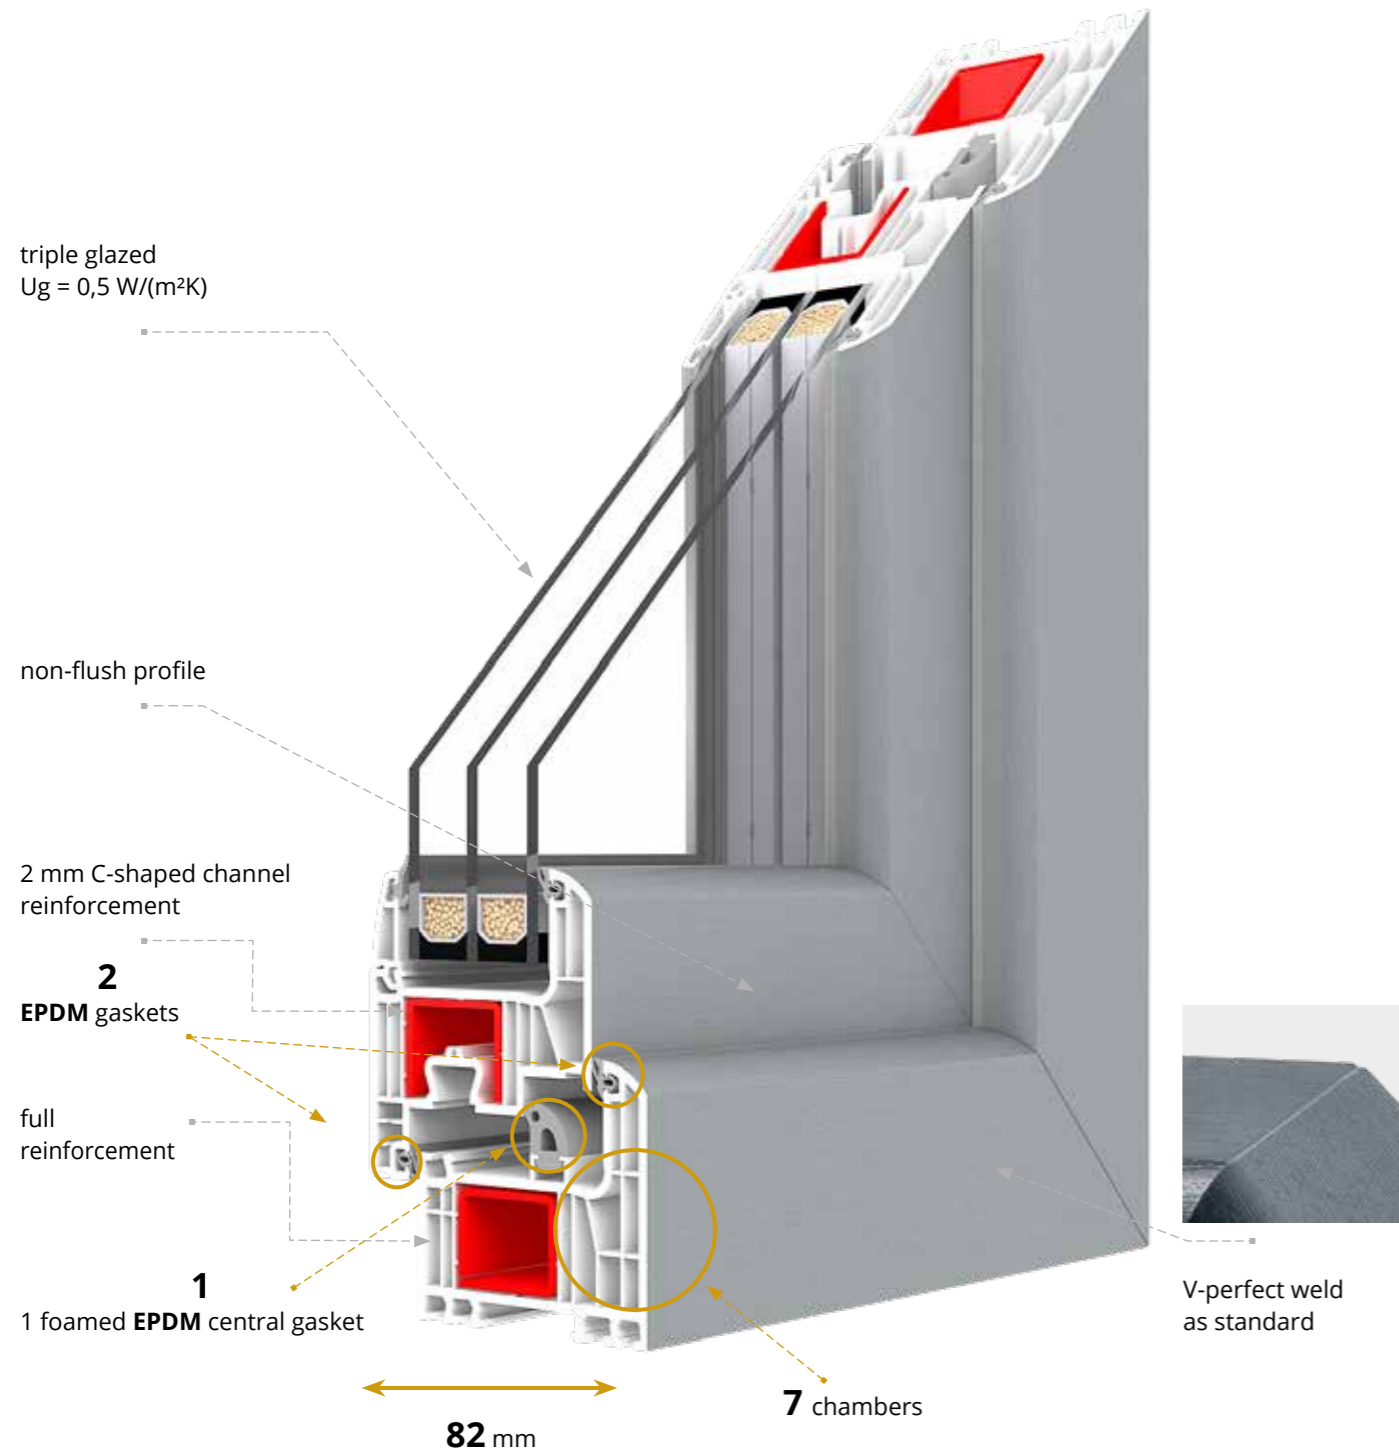

**IGLO ENERGY CLASSIC**  
RENOVATION FRAME 47 mm

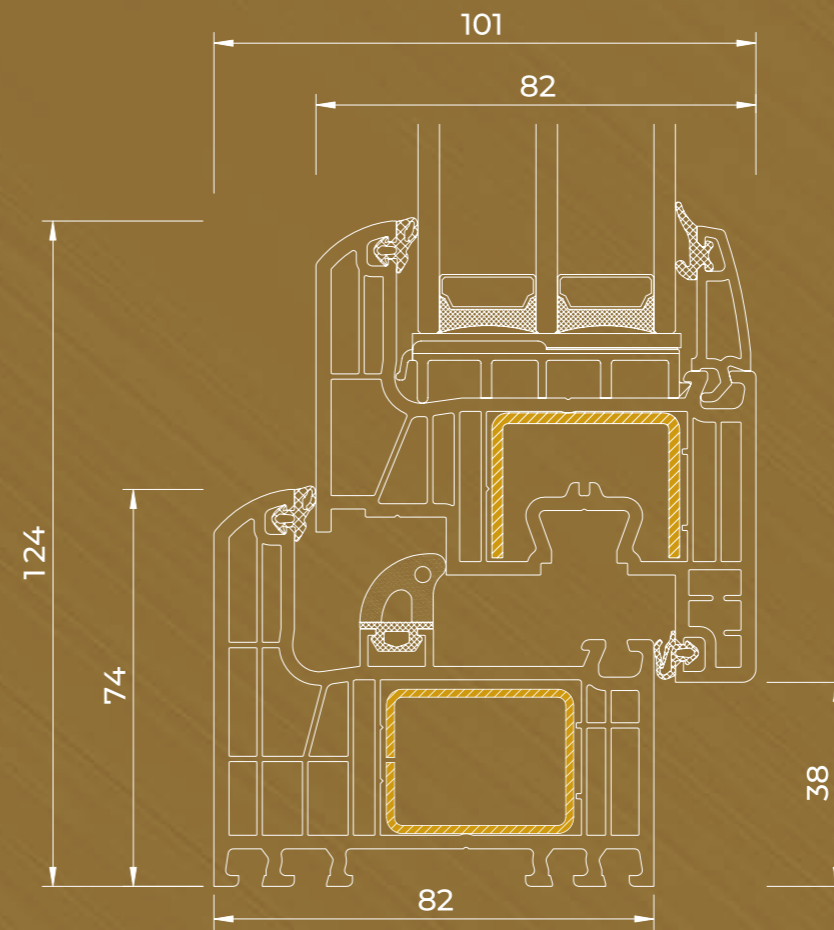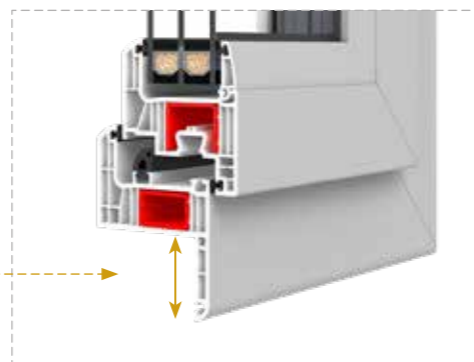

**IGLO ENERGY CLASSIC**  
RENOVATION FRAME 47 mm

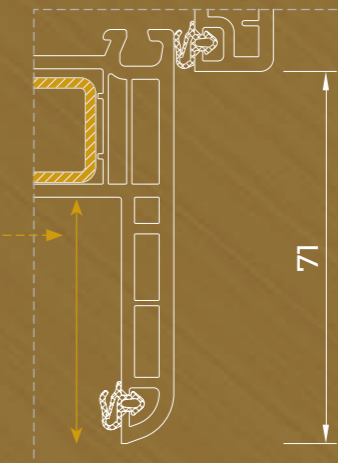

- MACO fittings with 4 anti-burglary catches
- 2-chamber glazing unit filled with argon with  $U_g=0,5 \text{ W/(m}^2\text{K)}$
- glazing with packages in the range of 24-52 mm (by default in a 2-chamber package 48 mm - 4/18/4/18/4)
- galvanized steel frame or Swisspacer Ultimate warm plastic edge
- microventilation
- aluminum handle
- black or grey EPDM perimeter, glazing and central seals
- wide range of pvc veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- full (closed) steel frame reinforcement, „c” shaped steel sash reinforcement
- 5-chamber PVC under-sill strip with a gasket
- V-Perfect weld as standard

## IGLO ENERGY CLASSIC

**7**  
chambers

**3**  
EPDM gaskets

**82**  
installation depth  
/ mm /

**0,73\***  
 $U_w$  for  $U_g=0,5 \text{ W/(m}^2\text{K)}$

\* value determined by calculation method

**R**  
renovation frame  
47 mm



Class profile

**A**



## IGLO EDGE

7-chamber frame and sash profiles, with an installation depth of 82 mm. The system is equipped with a specially designed triple seal: external, internal and central made of EPDM and gaskets under the glazing unit.

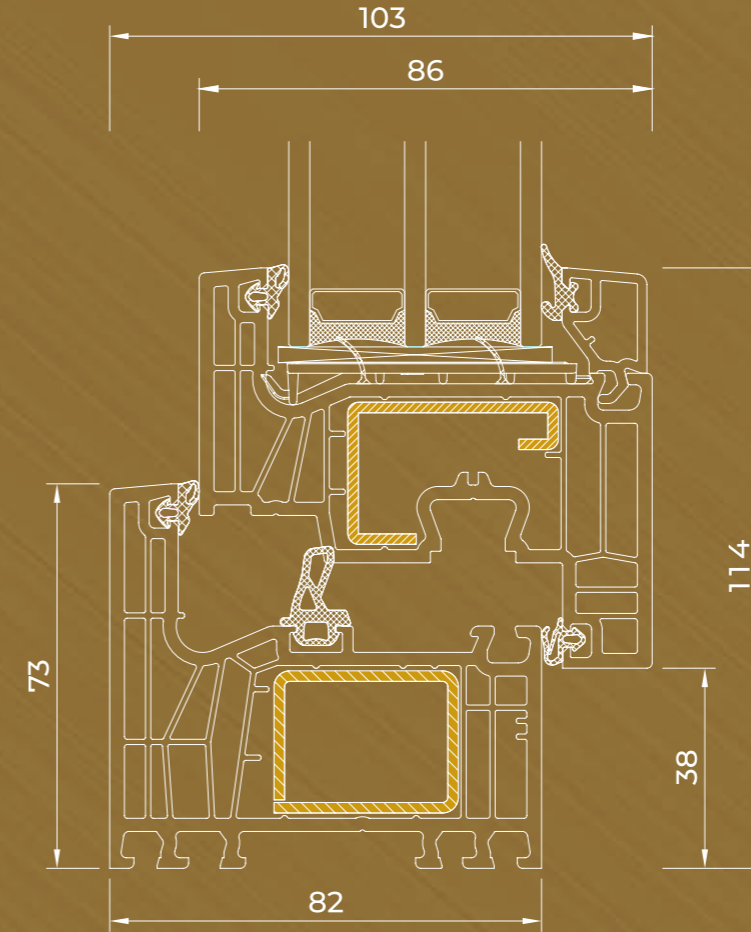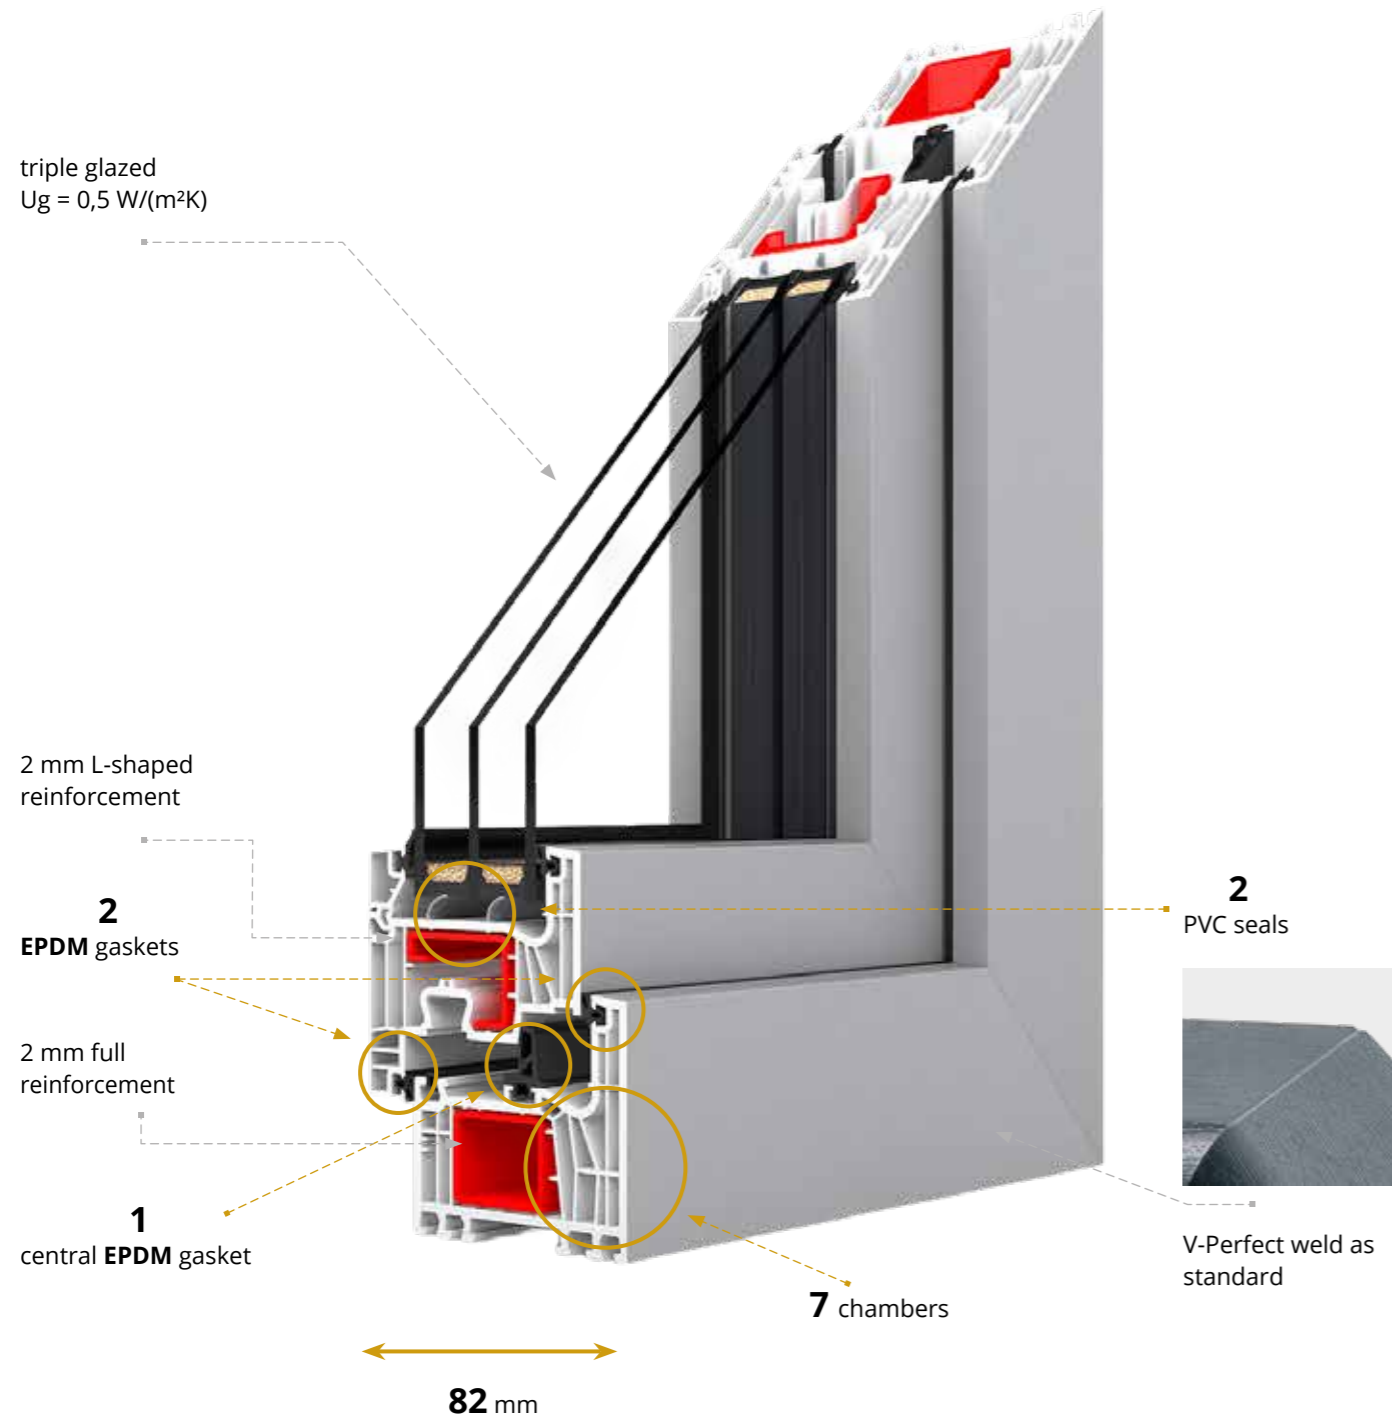

- MACO fittings with 4 anti-burglary catches
- 2-chamber glazing unit filled with argon with  $U_g=0,5 \text{ W/(m}^2\text{K)}$ , optionally 3-chamber package with  $U_g=0,4 \text{ W/(m}^2\text{K)}$
- glazing with packages in the range of (by default in a 2-chamber package 48 mm - 4/18/4/18/4)
- Swisspacer Ultimate warm plastic edge (optional galvanized steel spacer)
- microventilation
- aluminum handle DUBLIN
- black or grey EPDM perimeter, glazing and central seals
- wide range of PVC veneer colors
- 3 profile colors to choose from: white, brown or anthracite
- sash lifter (blocks incorrect handle position - depending on the window height)
- gasket filling the lower fitting groove
- 2 mm full (closed) steel frame reinforcement, L-shaped steel door sash reinforcement
- 5-chamber PVC under-sill strip with a standard seal
- V-Perfect weld as standard

## IGLO EDGE

**7**  
chambers

**3**  
EPDM gaskets

**82**  
installation depth  
/ mm /

**0,73\***  
 $U_w$  dla  $U_g=0,5 \text{ W/(m}^2\text{K)}$   
TRIPLE 3-GLAZED

**0,66\***  
 $U_w$  dla  $U_g=0,4 \text{ W/(m}^2\text{K)}$   
QUADRUPLE 4-GLAZED

\*value determined by calculation method


Class profile

**A**



## FOIL COLORS SAMPLE

The printout may differ from reality.

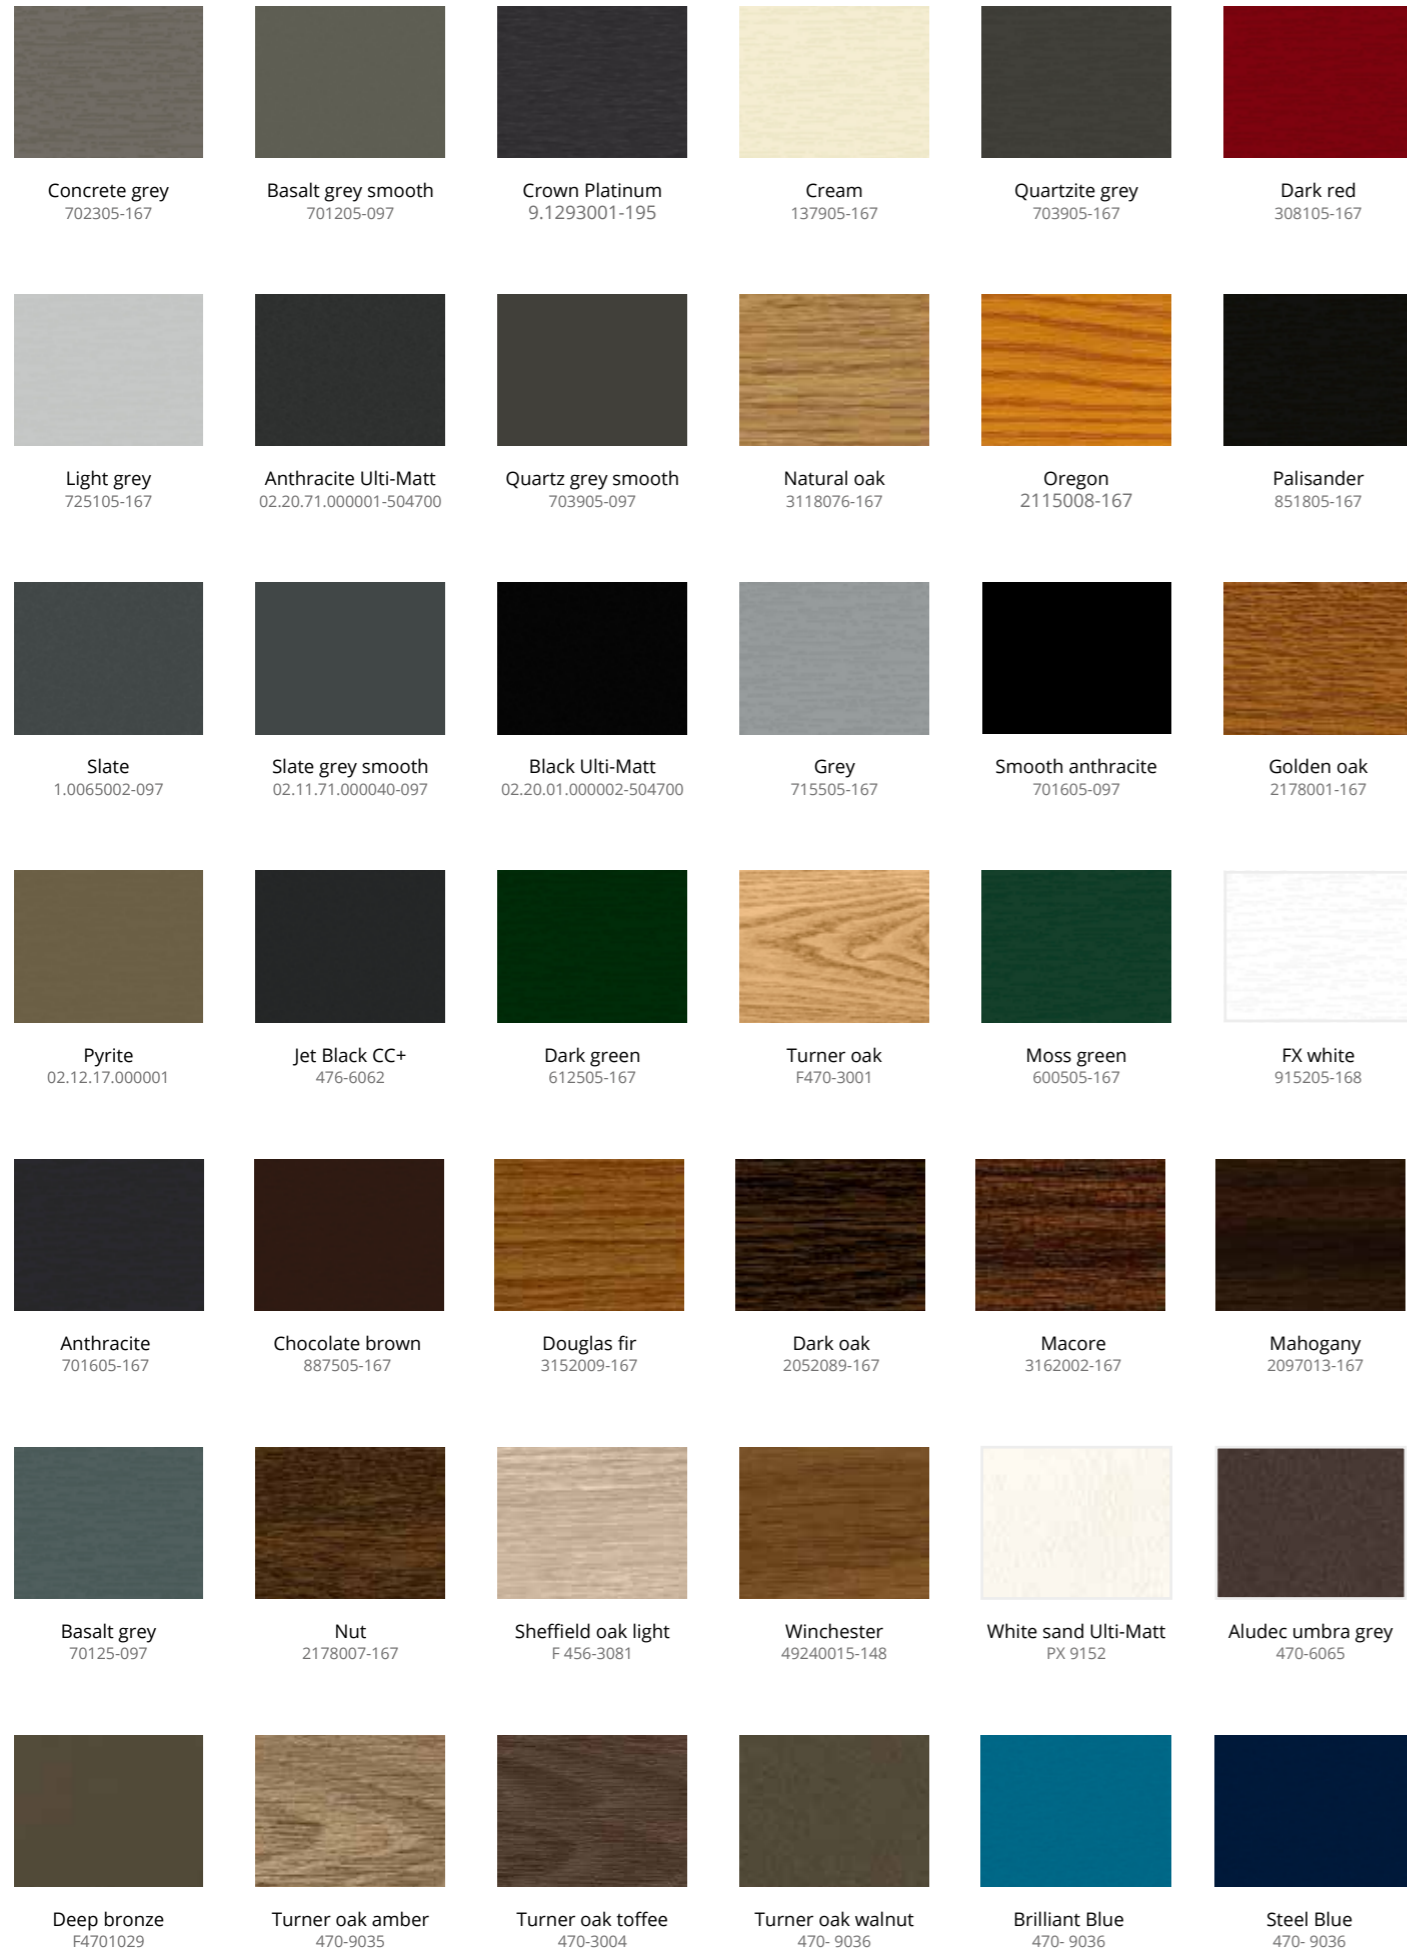

## HANDLES

The handles used in our products are made of aluminum and are distinguished not only by their elegant design, available color options, but also by their ergonomic shape. The handles can be available in options with a key or a button to prevent accidental opening (an option especially recommended for children's rooms).

### ALUMINUM WINDOW AND BALCONY HANDLES

#### STANDARD IGLO 5 WINDOW HANDLE



#### IGLO ENERGY HANDLE



#### IGLO 5 HANDLE WITH KEY



#### DUBLIN WINDOW HANDLE<sup>4</sup>



#### DUBLIN WINDOW HANDLE WITH BUTTON<sup>4</sup>




#### DUBLIN WINDOW HANDLE WITH A KEY<sup>4</sup>




#### BALCONY DOUBLE SIDED HANDLE WITH UNDER ROLLER-SHUTTER LOCK COVERING PLATE<sup>1</sup>



#### BALCONY VERANDA DOOR HANDLE UNDER THE ROLLER SHUTTER<sup>2</sup>

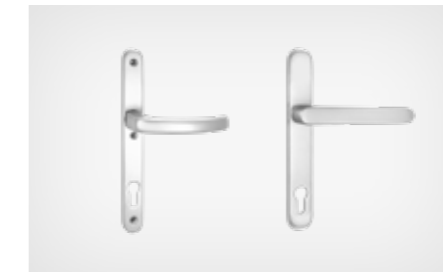

#### BALCONY VERANDA DOOR HANDLE<sup>2</sup>

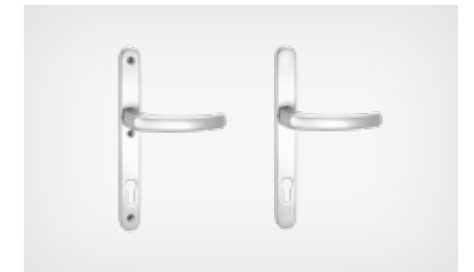

#### BALCONY HANDLE DOUBLE SIDED WITH LOCK COVERING PLATE<sup>3</sup>



Available in colors:  
white, silver, olive and brown.



<sup>1</sup> Available for Iglo 5 Classic with DM 25 locking mechanism, Iglo PP (intermediate profile)

<sup>2</sup> Also available in black (RAL 9005)

<sup>3</sup> Available for Iglo EXT, Iglo 5 Classic with DM 25 lock

<sup>4</sup> Available in 6 colors: white, brown, silver, anthracite, black and gold

## GLASS

Our offer includes many types of glass, which are characterized by the highest quality of workmanship. Choose glass for your windows that will meet your expectations and which will add a unique character to the interior.

We have been producing glazing packages since 1994. We have a modern glass tempering plant and our own research laboratories, which ensure the highest quality of the glazing units that we produce.

The glazing units can be equipped with special capillaries that equalize the pressure inside the glazing with atmospheric pressure. Thanks to this solution, the glazing units will work perfectly in seaside locations as well as those located high in the mountains.



**Safety**  
Possibility of using a thermal coating.



**Satin matt**




**Stopsol brown 6 mm**



**Stopsol blue 6 mm**



**Ornament Chinchilla**



**Ornament Delta**



**Ornament Silvit**



**Ornament Cathedral**



**Ornament Master Carre**



**Ornament silvit**



**Antisol green**  
4 lub 6mm



**Antisol brown**  
4 lub 6mm



**Antisol grey**



**Antisol blue**  
4 or 6mm



**Float 4, 6, 8, 10 mm**  
Possibility of using a thermal coating.



**Mirastar**

## WARM EDGE

# SWISSPACER ULTIMATE

no extra charge



**White**  
RAL 9016



**Light grey**  
RAL 7035



**Gray**  
RAL 9023




**Light brown**  
RAL 8003



**Dark brown**  
RAL 8014



**Black**  
RAL 9005

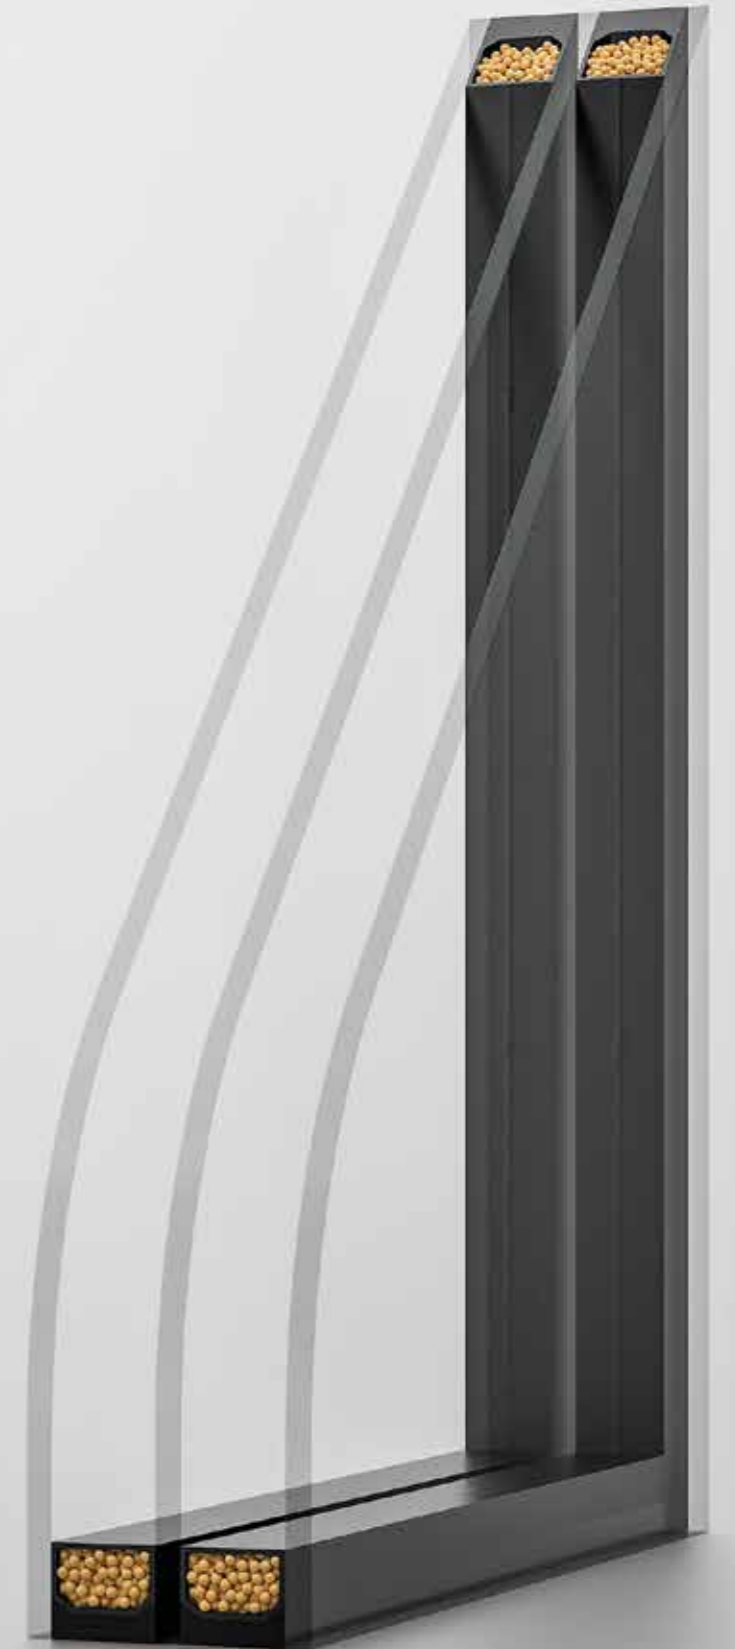

More details  
you will find in  
our catalogue





**NEW**

## **D-ART** LINE

energy efficient and modern doors



**NEW**

## **D-GATE**

sectional gates





**Technical data** **IGLO 5 CLASSIC**



**IDEAL NEO MD**



**IDEAL NEO MD-FS**



**IGLO ENERGY CLASSIC**



**IGLO EDGE**

<b>Number of chambers</b>	5	6	6	7	7
<b>Installation depth</b>	70 mm	76 mm	76 mm	82 mm	82 mm
<b>Number of gaskets</b>	2	3	3	3	3
<b>Thermal transmittance</b>	<b>Uw = 0,83 W/(m²K)*</b> <small>*For a window measuring 1230x1480 mm, with steel reinforcement and the argon gas-filled glass package Ug = 0,6 W/(m²K), with the Swisspacer plastic spacer bar.</small>	<b>Uw = 0,76 W/(m²K)*</b> <small>*For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.</small>	<b>Uw = 0,73 W/(m²K)*</b> <small>*For a window measuring 1230x1480 mm, with the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.</small>	<b>Uw = 0,73 W/(m²K)*</b> <small>*For a window measuring 1230x1480 mm, with steel reinforcement and the argon gas-filled glass package Ug = 0,5 W/(m²K), with the Swisspacer plastic spacer bar.</small>	<b>Uw = 0,66 W/(m²K)*</b> <small>*For a window measuring 1230x1480 mm, with steel reinforcement and the argon gas-filled glass package Ug = 0,4 W/(m²K), with the Swisspacer Ultimate plastic spacer bar.</small>
<b>Glass packages</b>	24-40 mm	24-54 mm	36-68 mm	24-52 mm	48-58 mm
<b>Sound insulation</b>	34-43 dB	36 - 38 dB	36 dB	36-47 dB	36-47 dB



Learn more about our entire offer.



up to **7000**  
windows daily



**4000**  
employees



**650**  
vehicles



**118 Tsd. m²**  
surface production

SINCE 1985

FAST DELIVERY TIME

